




How To Manually Lower Antenna

IN CASE OF EMERGENCY, YOU CAN MANUALLY STOW THE DISH FOLLOWING THESE STEPS WITH A PHILLIPS SCREWDRIVER AND A 7/16 WRENCH. THIS REQUIRES GETTING ON TOP OF THE ROOF!

1. CENTER THE ANTENNA REFLECTOR WITH THE RV ROOF LINE BY HOLDING EACH SIDE OF THE REFLECTOR AND SLOWLY LINE IT UP (TURNING SIDES UP OR DOWN) SO IT IS CENTERED HORIZONTALLY STRAIGHT FORWARD
2. REMOVE THE PLASTIC MOUNT BASE COVER USING A PHILLIPS SCREWDRIVER
3. USE A 7/16 WRENCH ON AZIMUTH GEAR SHAFT TO ROTATE THE ANTENNA TO FACE THE REAR OF THE RV
4. USE A 7/16 WRENCH ON THE ELEVATION GEAR SHAFT TO LOWER THE ANTENNA ON TO THE ROOF
5. REINSTALL THE PLASTIC BASE COVER

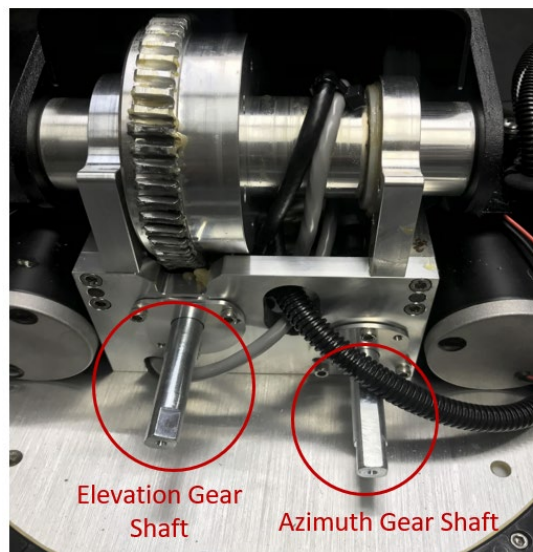

Please contact RF Mogul Tech Support if you have any questions at:

Phone: 801-895-3308

Email: techsupport@rfmogul.com

Website: <https://www.rfmogul.com/submit-a-ticket>